

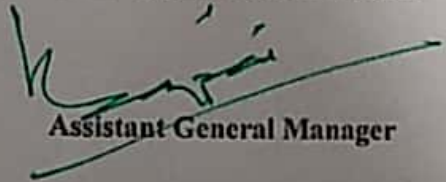
**ALLAHABAD BANK**  
**ZONAL OFFICE, BAHRAICH**  
**114, RAIPUR RAJA CIVIL LINES, BAHRAICH**  
**MATERA KALAN BRANCH**

SEALED tenders are invited from bank's empanelled vendors' for interior/ furnishing & electrical works for the captioned project. Tender document may be downloaded from the Bank's website [www.allahabadbank.in](http://www.allahabadbank.in) or collected from and submitted to "The Assistant General Manager, Zonal Office, Bahraich, 114 Raipur Raja, Civil Lines, Bahraich- 271801" as per following programme:-

1	Issue of Tender documents	From 01.02.2019 to 16.02.2019 during office hours
2	Submission of Tender	On 18.02.2019 or before to upto 3 pm
3	Opening of Tender	On next working day at 3.30 pm
4	Validity of Tender	90 days from the last date of submission of the tender
5	Earnest Money Deposit(EMD)	Rs.3500/- for Interior/Furnishing work & Rs.3000/- for Electrical/LAN Cabling work in form of DD/IOI payable at Bahraich.
6	Retention Money(RM)	Retention amount @ 10% to be deducted from the running bills/final bill & will be released after 3 months of date of completion of work.
7	Time of completion(TOC)	30 days from date of work order
8	Defect Liability Period(DLP)	3 months
9	Liquidated damages for delay	If contractor fails to complete the job within the stipulated time, the bank will be entitled to change liquidated damage @ 1% of the accepted contract sum per week or part thereof, subject to maximum of 10% of the accepted contract sum.
10	Payment terms	No advance will be paid. However, maximum one running bill (minimum amount of 1.50 lacs) may be considered for payment during progress of work in both the cases. TDS, Retention money will be deducted as per the rules.

The Bank reserves the right to cancel any or all tenders and stop the process at any point of time without assigning any reason or notice whatsoever.

Date: 31.01.2019

  
Assistant General Manager

**ALLAHABAD BANK**

**PROPOSED ESTIMATE FOR FURNISHING WORK AT MATERA KALA BRANCH, AT Distt. BAIHRAICHL.**

**BILL OF QUANTITY**

S.No.	DESCRIPTION OF ITEM	UNIT	QTY.	RATE	AMOUNT IN Rs.
1 *	Providing and fixing at all height false ceiling of straight edge 12.5 mm Gyp board, including providing and fixing of frame work made of special sections power pressed from M.S. sheet and galvanised in accordance with zinc coating 600 as per IS: 277 and consisting of angle cleats of size 25mm wide x 1.6 mm thick with flanges of 22mm and 37mm at 1200mm centre to centre one flange fixed to the ceiling with dash fastner 12.5 mm dia x 40 mm long with 6mm dia bolts to the angle hangers of 25x25x5mm of required length, and other end of angle hanger being fixed with nut and bolts to G.I. channels 45x15x0.9mm running at the rate of 1200mm centre to centre to which the ceiling section 0.5mm thick bottom edge of 80 mm with tapered flanges of 26 mm each having clips of 10.5mm at 450 mm centre to centre shall be fixed in a direction as per manufactureer's specification.	SQM	30.00		
	Item includes complete works including cutting cutouts for light fixtures and HVAC equipments as required.				
2 *	MODULAR FALSE CEILING - ARMSTRONG / equivalent make	SQM	39.00		
	Supplying, providing and fixing modular false ceiling with hot dipped steel main section (prefinished with polyester paint) of size 24 MM X 32 MM X 0.27 MM at every 1200 MM & rotary stitched cross "T" 600 MM c/c and 22 MM X 22 MM X 0.457 MM wall angle around the wall to form a grid of size 600 MM X 600 MM & suspending the grid with 4 MM diagonal rod and 6 MM nylon rawl plug at every 1200 MM interval at the main "T" section & laying 600 MM X 600MM size Mineral fiber ceiling tiles 15 MM thick of approved quality of M/s Armstrong or approved make. Rate should also included for provision of light fittings, AC grill, or other opening if required. All complete as directed.				
3	Supplying, providing and fixing full height partly glazed partition of both side 6 MM water proof plywood finished with 1 MM thick laminate of approved colour and shade over well seasoned Malaysian salwood/mirindi section of 50 MM X 40 MM frame at 600 MM maximum distance horizontal and vertical spacing treated with two coat of wood preservatives with wire management system. Frame should be fixed to the ceiling firmly. Middle portion at 900 MM to 2100 MM height shall have 5 MM thick plain float glass fixed with 10 MM thick teak wood molding duly polished. Allow 100 MM X 12 MM teak wood skirting duly polished with N C lacquer. All exposed edges shall be covered with teak wood lipping with polishing complete in all respect.	SQM	27.90		
	Payment will be made for the area upto false ceiling only. (M/s Century, M/s Green or of approved).				
4	P/T in position readymade anodized aluminium grill of approved design and quality fixed with 35x25mm teakwood beading finished with lacquer finish	SQM	7.10		
5	Providing and erecting in position Cash counter of size 1400x900x750 inclusive of 1100mm high, 350mm wide customer writing top finished with mirror polished 18mm thick granite slab jet black in shade i/c moulding piece, fixed with chemical adhesives. Facia of 1 mm. laminate over water proof board with teak wood / metlam skirting beading & moulding etc. Finished with Polyurethane polish from MRF	RMT	2.60		
6	Entrance door & Entrance Aluminum Glazing with 25 micron anodized aluminium frame and 10 mm thick etched float glass with top & bottom frame, door handle & floor spring. Complete all hardware of approved make or equivalent	SQM	4.50		



	Supplying, providing and fixing Side Cabinet made of 19 MM thick block board all sides, top and front finished with 1 MM thick laminate of approved colour and shade with sliding shutter of 10 MM ply & intermediate shelves, lock of Godrej or approved, Powder coated handle with two coat of synthetic enamel paint over a coat of primer on inner surface. All exposed edges shall be covered with teakwood lipping with polishing complete in all respect. (M/s Century, M/s Green or of approved) (B.M. Cabin)	NOS.	1.00		
	Size : 900 MM X 450 MM X 750 MM				
8	Supplying, providing and fixing Low height partly glazed partition of both side 6 MM water proof plywood finished with 1 MM thick laminate of approved colour and shade over well seasoned Malaysian salwood/mirindi section of 50 MM X 40 MM frame at 600 MM maximum distance horizontal and vertical spacing treated with two coat of wood preservatives with wire management system. Middle portion at 900 MM to 1200 MM / 900 MM to 2100 MM height shall have 12 MM thick plain float glass fixed with 10 MM thick teak wood molding duly polished. Allow 100 MM X 12 MM teakwood skirting duly polished with N C lacquer. All exposed edges shall be covered with 10 MM thick teakwood beading with polishing complete in all respect.	SQM	8.00		
9	Storage cabinet of 1 mm. laminate over 12 mm thick ply with Polyurethane polish inside painted with all the fittings & Locks etc. 675 mm high & 375 mm deep with horizontal racks inside.	SQM	4.34		
10	Supplying, providing and fixing Notice Board of size 900 MM X 600 MM X 100 MM made with 12mm soft board on 6 MM ply covered with Raymond's velvet cloth at top. The shutter made of 30 MM X 25 MM teak wood section and 5 MM thick plain float glass hanged with 2 (two) Nos brass hinges, godrej lock, brass handle etc. complete in all respect.	Nos.	1.00		
11	Supply and fixing in position overall 37mm thick solid core approved flush door shutter finished with 1mm thick laminate of approved shade on both sides of the door i/c cost upto 900mm from floor level .the upper portion of the shutter is to be provided	SQM	7.15		
12	providing and erecting in position Manager's/ Officer's table with basic structure made from 19mm thick BWR grade block board for sides .top and modesty panel ,finished with 1mm thick laminate of approved shade i/ inner faces . Drawe cum cabinet unit of a	NOS.	1.00		
	a) approx. size of 1500x750x750	NOS.			
	b) 1200x750x750mm (Advance Section)	NOS.	1.00		
13	s/f rectangular low height counter/clerical workstation ( 1200x750x750mm ) supported on side pedestals made of BWR grade boards or intermediate block boards support .the top shall be of 18mm thick mirror polished jet black granite.	NOS.	2.50		
14	S/erecting running counter in server room 750mm deep and 750mm high i/c drawer cum cabinet unit for files, space for CPU or computer, modesty panel , tea tray etc made with 19mm thick phenol formaldehyde BWR block board on top supporting sides with necessary	RMT	2.00		
15	Supply and erecting running counter/table for daftari/cash counting area 750mm deep and 7500mm high made with 19mm thick BMW block board on top with necessary well seasoned Malaysian Sal wood frame work finished on top with 1mm thick laminate of approve	RMT			

✓

	Supply and erecting free standing suggestions box of overall size 450mm longx300mm deepx600high made of 19mm mm thick BWR block board complete with hardware fitting. Top and exposed surfaces of block board are to be finished with 1mm thick lamination	NOS.	1.00		
17	Supply and erecting cheque drop box ( overall size 450x300x750 ) made of 19mm thick Phenol formaldehyde bonded ply board and the curved portion at top made out of 90mm C.P. teakwood section .A slit opening at top made out of 10mm x 150 mm is to be provided	NOS.	1.00		
18	supplying and erecting wall mounted Customers writing ledge of approx size 900x300mm made of 12mm thick machine polished smoke glass supported on decorating wrought iron wall brackets of suitable size and quality with vacuum bush including making slots	NOS.	1.00		
19	Supplying, providing 12 MM thick plain float glass in front of Clerkcial counters in 2 Nos. of size 300 MM machine polished edge fixed with wooden frame and teak wood moulding duly polished complete in all respect.	SQM	1.90		
	M/s Modifloat, M/s Santgobind or approved				
20	Plastic emulsion paint on Wall of Banking Hall, Manager Room, Computer Room.	SQM			
21	Wooden Panelling (Columns)	SQM	20.07		
	Frame-1" X 0.75" Kail WoodSection at every 1'-6" c/c (Vertical/Horizontal)				
	Ply Wood-6.0mm thick MR Grade IS303				
	Laminate-1.0mm thick approved colour 6.0mm wide groove				
					<b>0.00</b>
	* As per requirement.				





PROJECT - ESTIMATE FOR ELECTRICAL WORKS  
 BANK - ALLAHABAD BANK  
 BRANCH - MATERA KALA BRANCH  
 ZONE - BAHRAICH

S.NO.	DESCRIPTION OF ITEM	QTY.	RATE (Rs.)	AMOUNT (Rs.)
C.	<b>ELECTRICAL WORKS.</b>			
a.	<b>LIGHT, FAN, 6 AMPS., 6/16 AMPS.</b>			
1	Light, Fan & 6 Amps. Switch Points.			
2	Circuit Wiring (Light, Fan & 6 Amps. Switch Points).	35		
3	6/16 Amps. Switch Socket	220		
4	Circuit Wiring (6/16 Amps. Switch Points)	10		
b.	<b>U.P.S. &amp; COMPUTERISATION.</b>	130		
5	Selector Switch			
6	Circuit Wiring (UPS DB to Computer Points).	1		
7	6 Amps. Switch Socket.	220		
8	UPS Protection System (Incoming And Outgoing)	30		
a.	40 Amp.	1		
b.	32 Amp.	1		
c.	<b>MAINS &amp; SUB MAINS - Electrical connection of 15.0 KW. (Approx.)</b>			
9	Cable (Main).			
a.	35 mm <sup>2</sup>			
10	Cable (Sub Main)			
a.	10 mm <sup>2</sup>	30		
b.	16 mm <sup>2</sup>	25		
11	<b>ELECTRICAL PANEL</b> Design, manufacture, providing, storing & installing in position, effecting proper connection, testing and commissioning of panel made of 14 SWG, CRCA sheet steel. It shall be dust and vermin proof. It shall have compartmentalized construction with bus bar chambers, cable alley, cable glands plate etc. as required, duly painted from inside as well outside It shall have the following - MAIN PANEL 1 No. 125 Amp. TPN, MCCB (25 KA breaking capacity), Busbars 100 Amp., 3 phase, 4 strips, 415 volts, 50 Hz. copper busbars with colour coded PVC heat shrinkable sleeves. Metering. 1 No. Voltmeter (range 0-500V), 3 phase. 1 No. Ammeter (range 0-200 Amp.), 3 phase with CT operation. 3 Nos. Phase Indication Lamps (red, yellow and blue). Outgoing 2 Nos. (63 Amp.) TPN, MCCB (AC & RAW) 3 No. (63 Amp.) TPN, MCB (UPS & ATM) 4 No. 32 AMP DP MCB for Outside light and board 1 No. 125 Amp. Three Phase Change Over for D.G. Set. (Seperate from the panel) The design of panel should be got approved by the Architect before manufacturing. Also, the provision for 1/2 spare outgoing should be considered for future expansion. The job shall be completed, to the satisfaction of the Bank Engineer/Architect.	1		
12	SITC of 100Amp Kit kat Fuse unit 4nos on wooden board (3' * 3') complete with	4		
13	TPN Distribution Boards - Horizontal Type.			
a.	4 Way	1		
14	SPN Distribution Boards - Horizontal Type.			
a.	12 Way.	1		
15	SP MCB	30		
16	DP MCB			
17	Earthing Stations	3		
18	Earthing Wire.	15		

FIXTURES.			
19	Supply and Installation of Square Led 1x36 watt fitting make: Philips, Siska, Crompton, Wipro or equ. Rate	10	
20	SITC of Led Down Lighter 12 Watt round fitting Make Philips, Siska,	15	
21	9 W LED LAMP B22 White Bracket Light		
22	8 W, downlight round slim-natural	2	
23	Wall Mounted Fan,		
24	Ceiling Fan	6	
A	1200 mm dia		
25	Exhaust Fan	3	
26	Call Bell	2	
		1	
TELEPHONE & LAN POINTS.			
27	Telephone Junction Box	2	
28	Telephone Cable	40	
29	Telephone Points with Wiring	4	
			0.00

Data Cabling Work at MATERA KALA BRANCH							
Sl.No.	Item description			Quantity	Unit	Rate	Amount
1	single Information Outlet (I/O) per number (D LINK) with Face Plate and Base Box			9	no		
2	dual Information Outlet (I/O) per number (D LINK) with Face Plate and Base Box			-	no		
3	jack Panel # 24 ports						
4	24 Port D-Link Switch			1	no		
5	Patch Cord - 1 metre -			1	no		
6	Patch Cord - 2 metre -			9	no		
7	UTP cable( ECAT#6) per meter -			9	no		
8	PVC Channel (flat) - 1.5 mm & above - Make 'Modi'			225	rm		
	a	1.25" size per meter					
	b	1" PVC conduit		-	rm		
9	9U, 19", 450mmD X 300mmw closed wall mount MS 18/20 SWG powder coated rack with glass door opening in the front with power panel, cable manager & lock and key - Universal make			110	rm		
				1	no		
10	labelling						
11	patch panel punching			10	no		
12	rack installation			1	no		
				1	no		
				<b>Total Tendered Cost (Rs.)</b>			<b>0.00</b>
	<b>specifications</b>						
	DATA CABLE, Information outlet, switch, jack panel, Patch cords all to be <b>D link Make</b>						